




Rubber matting

Odin Eco checker mat

Colour: black
 Finish: one side checker design, other side fabric finish
 Temperature range: -30° to +70°C

Features: strong and abrasion resistant • Equipped with non slip checker profile on the top

Application: very versatile applicable for indoor

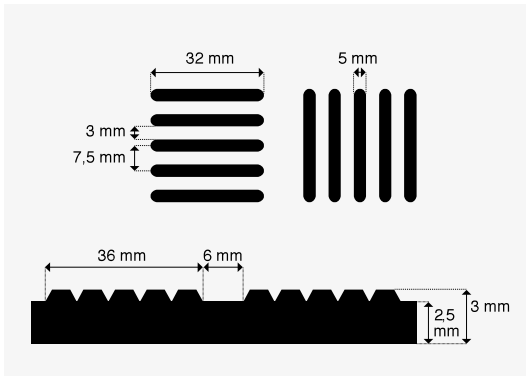

		Test method
Specific gravity grs/cm ³	1,50	DIN 53508
Hardness shore A ± 5°	70	DIN 53505
Tensile strength Mpa	3	DIN 53504
Elongation at break %	200	DIN 53504
Compression set at 70°C for 22 hours %	20	DIN 53517

Thickness (mm)	No. of insertions	Width (mtr)	Length (mtr)	Quality	Article no.
3	0	1,00	10	SBR	CD65SX 3/0-1
3	0	1,20	10	SBR	CD65SX 3/0-1,2
3	0	1,40	10	SBR	CD65SX 3/0-1,4
3	0	1,50	10	SBR	CD65SX 3/0-1,5