

TYPE SPS

Super Starco™



www.go4b.com




FREE Engineering Design Service
www.go4b.com



HDP / Nylon / Polyurethane

HDP / Nylon / Poliuretano

AGRICULTURAL & INDUSTRIAL

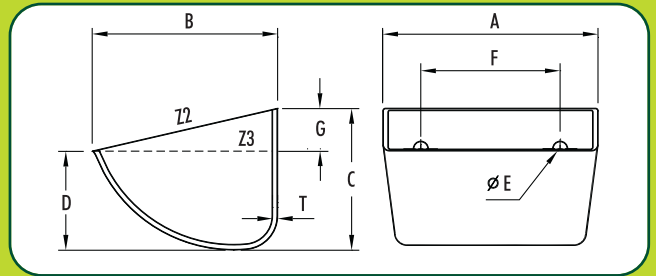

No.	A (mm)	B (mm)	C (mm)	D (mm)	T (mm)	HDP (kg)	Nylon (kg)	PU (kg)	Capacity (Litres) Capacidad (Litros)		No.	Holes Agujeros			Max. Pcs/Mtr
									Z2 (total)	Z3 (water)		E (Ø mm)	F (mm)	G (mm)	
SPS80-80 HDP	90	85	63	43	4	0.08	0.09	0.10	0.24	0.18	2	9.0*	43	18	15.00
SPS100-90 HDP	110	100	67	44	5	0.11	0.13	0.15	0.38	0.29	2	9.0*	50	20	14.00
SPS120-100 HDP	129	110	80	55	5	0.15	0.18	0.20	0.59	0.46	2	9.0*	67	25	12.00
SPS130-120 HDP	135	120	85	57	5	0.19	0.23	0.25	0.70	0.54	2	9.0*	70	25	11.00
SPS140-120 HDP	145	120	90	62	5	0.18	0.22	0.24	0.80	0.61	2	8.5*	70	25	10.80
NEW SPS130-130 HDP	146	130	90	60	5	0.21	0.25	0.28	0.87	0.65	2	9.0*	70	25	10.80
SPS160-140 HDP	172	152	113	78	6	0.34	0.40	0.45	1.58	1.22	2	9.0*	100	30	8.60
SPS180-140 HDP	187	150	112	77	6	0.30	0.36	0.40	1.75	1.37	2	9.0*	100	30	8.60
SPS200-150 HDP	205	150	112	75	6	0.35	0.42	0.46	1.82	1.39	2	9.0*	100	32	8.60
SPS300-150 HDP	305	152	115	80	7	0.65	0.77	0.86	2.89	2.24	4	9.0*	51-102-51	32	8.50
SPS200-160 HDP	210	158	115	79	7	0.39	0.46	0.51	2.09	1.61	2	9.0*	100	32	8.50
NEW SPS230-170 HDP	240	175	138	93	7	0.61	0.73	0.81	3.06	2.40	2	11.0*	120	36	7.00
SPS240-165 HDP	250	170	132	93	7	0.54	0.64	0.71	3.10	2.40	2	11.0*	120	35	7.40
SPS280-165 HDP	293	170	132	95	7	0.67	0.79	0.88	3.75	3.00	3	11.0	80	36	7.40
NEW SPS280-170 HDP	282	175	138	97	7	0.67	0.80	0.88	3.76	2.96	3	11.0*	80	37	7.00
SPS280-180 HDP	290	185	140	97	7	0.84	1.00	1.11	4.20	3.30	3	11.0	80	36	7.00
SPS300-180 HDP	316	185	140	97	8	0.85	1.01	1.12	4.60	3.60	3	11.0	100	36	7.00
SPS330-180 HDP	347	185	140	97	8	0.90	1.07	1.19	5.00	4.00	3	11.0	110/120	38	7.00
SPS350-180 HDP	367	186	140	97	9	1.12	1.33	1.48	5.25	4.10	3	11.0	120	38	7.00
SPS300-215 HDP	318	220	168	117	9	1.18	1.40	1.56	6.60	5.20	3	11.0	100	50	5.88
SPS330-215 HDP	343	220	168	117	9	1.30	1.55	1.72	7.10	5.73	3	11.0**	120	50	5.88
SPS350-215 HDP	368	220	168	117	9	1.38	1.64	1.82	7.75	6.12	3/4	11.0	120/90	50	5.88
SPS370-215 HDP	390	220	168	117	9	1.45	1.72	1.91	8.15	6.42	4	11.0	90	50	5.88
SPS400-215 HDP	420	220	168	117	9	1.54	1.83	2.03	8.80	7.00	4	11.0	100	50	5.88
SPS450-215 HDP	470	220	165	115	9	1.56	1.86	2.06	9.70	7.70	5	11.0**	90	50	5.88
SPS500-215 HDP	525	220	168	117	9	1.84	2.19	2.43	11.25	9.00	5	11.0	100	50	5.88

Plastic buckets require a large flat washer of minimum 30mm O/D between the hex nut and the inside of the bucket.

* Recessed Holes

** Optional recessed holes

Los cangilones Starco requieren grandes diámetros de arandelas, mínimo Ø 30mm, para su montaje.

* Agujeros Embutidos

** Agujeros embutidos sobre pedido.