

D70

A 608

- NR-SBR, grey – commercial
- matting with hammerblow surface (one side hammerblow design, one side fabric impression)
- packaging see General Information

Hardness [Shore A]:	70 ±5
Density [g/cm <sup>3</sup> ]:	1.60
Tensile strength [N/mm <sup>2</sup> ]:	5
Elongation at break [%]:	300
Ozone resistance:	resistant
Weather resistance:	resistant
Oil resistance:	moderately resistant
Benzine resistance:	non resistant
Acid resistance:	moderately resistant
Strong bases:	resistant
Abrasion resistance:	moderately suitable

## WORKING TEMPERATURE RANGE

Medium	dyn. (stat.)	max.	short-term
Air	(-20) °C	+70 °C	+90 °C


## COMPRESSION SET DIN ISO 815

Duration	Temperature	CS
22 h	70 °C	50 %

**gumex**  
... pružné partnerství

## ROTA-CURED-SHEETS

Article-number	Thickness mm	Width m	Length m	No. of insert.
4024 99063	3.0	1.4	10	0
4024 99064	3.0	1.25	10	0

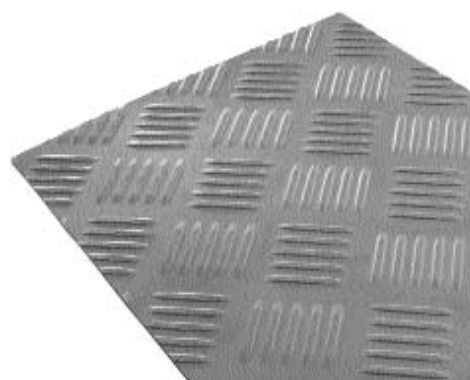

Please Note:

22.8.2003

This catalogue has been carefully compiled to advise you, our customer, in the best possible way. The information, figures, test values and data correspond to actual engineering standards and are the result of many years of tests and trials. As individual operation conditions influence the application of each product, the information supplied in this catalogue can only be seen as a rough guideline. In every case it is the sole responsibility of the customer to evaluate his individual requirements, in particular whether specified properties of our products are sufficient for the intended use. If there is any doubt (e.g. chemical resistance), do not hesitate to contact our qualified engineers. The use of our products is at the user's own risk. We do not have any influence concerning the application and individual usage. We do of course guarantee the quality of our products according to our general sales conditions, available on request.

Subject to alteration without prior notice – All mentioned properties contained in this catalogue are guiding values representing longterm experience average.

Semperit Technische Produkte Gesellschaft m.b.H. & Co KG  
A-2632 Wimpassing, Triester Bundesstraße 26  
Telefon +43 2630 310-0\*, Telefax +43 2630 310 320  
E-Mail: semperfex@semperit.at, Internet: www.semperit.at

**semperfex**   
A MEMBER OF THE SEMPERIT-GROUP